

MJ-F3528L180WX-X-JD

**SPECIFICATION SHEET** 

2019.04 V-1.0



### **Comprehensive Description**

Applying to BLIGHT, decorative lighting, LED Strip has the features of long lifetime and small brightness decay.

Various color temperature are available and only ONE BIN is used for each order to keep same color.

#### Material and technology:

- ◆ LED is packaged with pure gold thread and large chip;
- Lead-free SMT(RoHS), welding spot is rounded and strong;
- Double layer PCB to ensure stable electrical property;
- Authentic 3M adhesive tape with stronger stickiness;
- A variety of fittings are optional to install easily;
- Different waterproofing grade: IP65, IP67, IP68 and Nano waterproof;
- ◆ The best silica gel is used to make waterproof;

























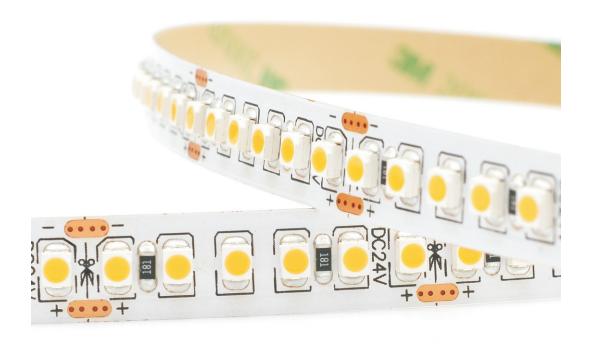

### **Technical Parameters**

Model: MJ-F3528L180WX-X-JD

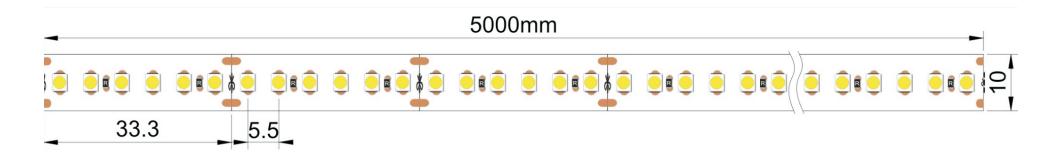

### **Optical parameters**

**Electrical parameters** 

LED Type

SMD3528

Ra

CRI>80&CRI>95

CCT

2100K/2400K/2700K/3000K/4000K/6000K

**Emitting Angle** 

120°

Luminous flux/LED

7-8Im/LED

0.6A/m Input Current DC24V Input Voltage Watt/m 14.4W/m **Others** 

**Energy Efficiency** 

Warranty

5 years

Α

Operating lifetime

30.000h -20°C- +45°C

Operating temperature Operating humidity

40%-70%RH

Waterproof grade

IP20,IP65,IP67,IP68


Dimensions LED Qty/m


5000\*10mm 180LED/m


Min cuttable distance

33.3mm(6LED)

# Test Report

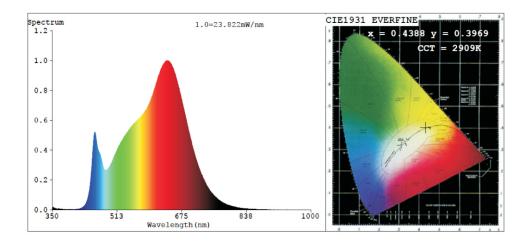





## Certifications











## **Installation Instructions**

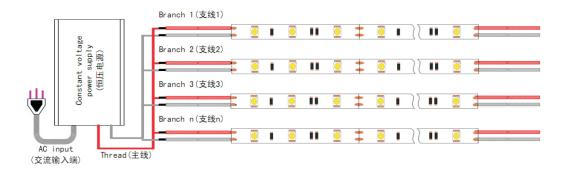

## Package

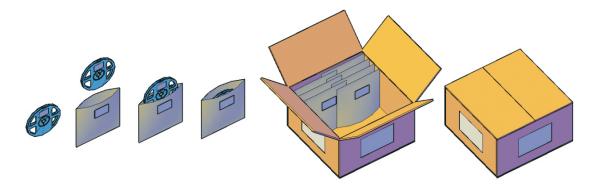



#### Note:


- 1.One Aluminum Foil Bag for one roll of LED strip, 5M/roll.
- 2.All the packaging materials are RoHS standard.
- 3. Heavy stuff are not allow to be loaded above the packaging box.




 When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:










Distortion(Wrong)



Bend(Right)

- LED strips are low voltage products, you must use the power supply(transformer). Please
  don't connect the led strip directly to the AC110 or AC220V, otherwise it will burn out the
  LED strips.
- Clean up the installation surface, it will ensure the reliability of the adhesive.
- The electrical connection process must be operated by a professional person.