


MJ-F2835L120WX-X-JD

SPECIFICATION SHEET

2019.04 V-1.0

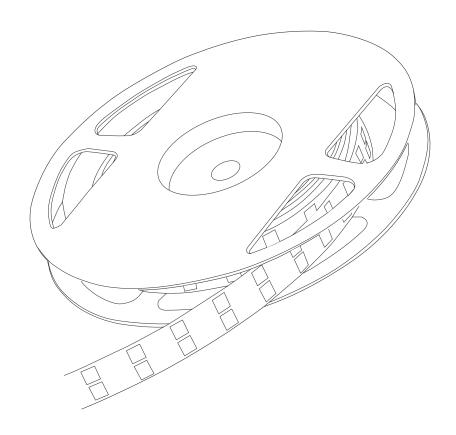

Comprehensive Description

Applying to BLIGHT, decorative lighting, LED Strip has the features of long lifetime and small brightness decay.

Various color temperature are available and only ONE BIN is used for each order to keep same color.

Material and technology:

- ◆ LED is packaged with pure gold thread and large chip;
- Lead-free SMT(RoHS), welding spot is rounded and strong;
- Double layer PCB to ensure stable electrical property;
- Authentic 3M adhesive tape with stronger stickiness;
- A variety of fittings are optional to install easily;
- Different waterproofing grade: IP65, IP67, IP68 and Nano waterproof;
- ◆ The best silica gel is used to make waterproof;


























Technical Parameters

Model: MJ-F2835L120WX-X-JD

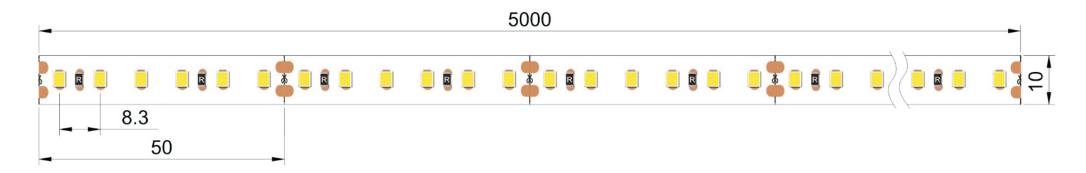

Optical parameters

Electrical parameters

LED Type

SMD2835

Ra

CRI>80&CRI>90

CCT

2100K/2400K/2700K/3000K/4000K/6000K

Emitting Angle

120°

Luminous flux/LED

22-24Im/LED

Input Current Input Voltage Watt/m

2.0A/m.1.0A/m DC12V/24V 24W/m

Others

Energy Efficiency

Warranty

Operating lifetime

Operating temperature

Operating humidity

Waterproof grade Dimensions

IP20,IP65,IP67,IP68 5000*8mm,5000*10mm

LED Qty/m

Α

5 years

30,000h

-20°C- +45°C


40%-70%RH


120LED/m


Min cuttable distance

25mm(3LED),50MM(6LED)

Test Report

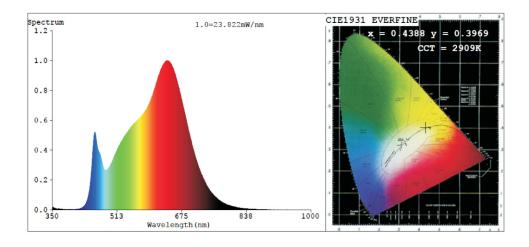





Certifications











Installation Instructions

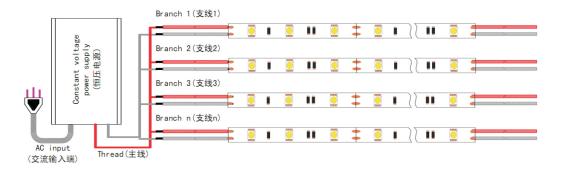

Package

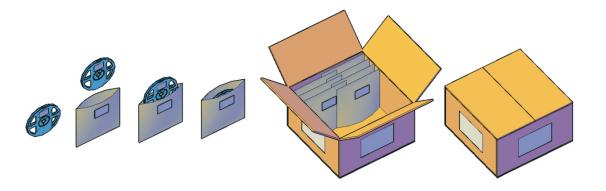



Note:


- 1.One Aluminum Foil Bag for one roll of LED strip, 5M/roll.
- 2.All the packaging materials are RoHS standard.
- 3. Heavy stuff are not allow to be loaded above the packaging box.




• When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:










Distortion(Wrong)



Bend(Right)

- LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC110 or AC220V, otherwise it will burn out the
- Clean up the installation surface, it will ensure the reliability of the adhesive.
- The electrical connection process must be operated by a professional person.