




晏杰光电
MAJOR LIGHTING

MJ-F2216L180WX-X-JD

SPECIFICATION SHEET

2019.04 V-1.0

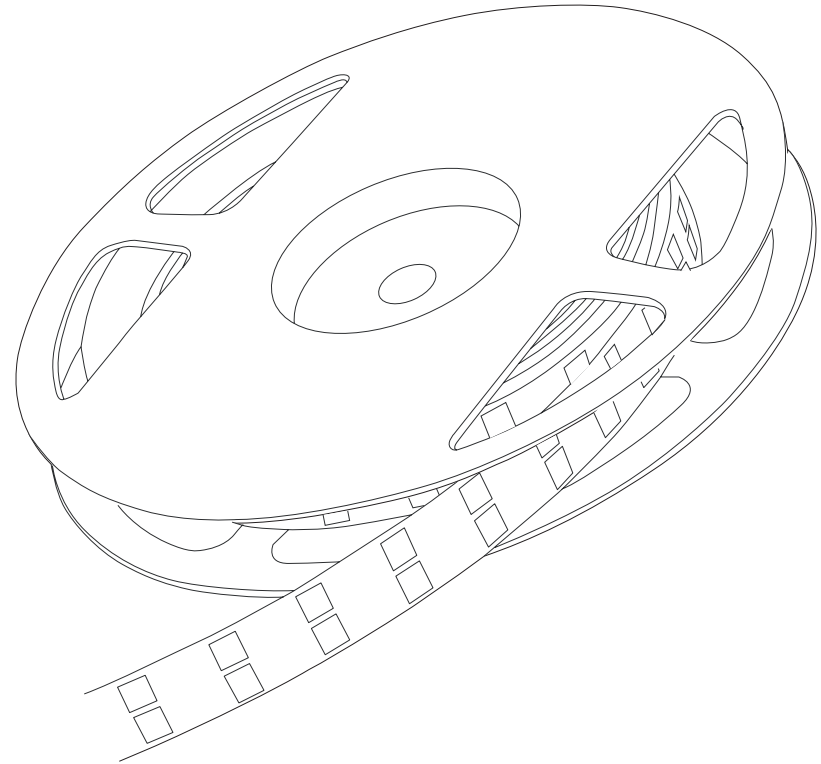


Comprehensive Description

Applying to BLIGHT, decorative lighting, LED Strip has the features of long lifetime and small brightness decay.

Various color temperature are available and only ONE BIN is used for each order to keep same color.


Material and technology:

- ◆ LED is packaged with pure gold thread and large chip;
- ◆ Lead-free SMT(RoHS), welding spot is rounded and strong;
- ◆ Double layer PCB to ensure stable electrical property;
- ◆ Authentic 3M adhesive tape with stronger stickiness;
- ◆ A variety of fittings are optional to install easily;
- ◆ Different waterproofing grade: IP65, IP67, IP68 and Nano waterproof;
- ◆ The best silica gel is used to make waterproof;



Technical Parameters

Model: MJ-F2216L180WX-X-JD

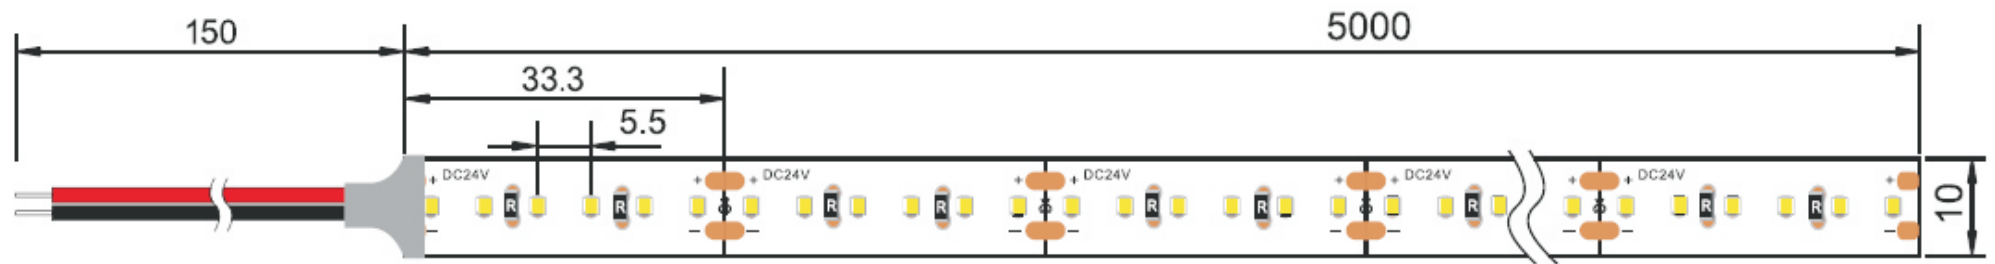

Optical parameters

LED Type	SMD2216
Ra	CRI>90
CCT	2700K/3000K/4000K/6000K
Emitting Angle	120°
Luminous flux/LED	6-7lm/LED


Electrical parameters

Input Current	0.6A/m
Input Voltage	DC24V
Watt/m	14.4W/m

Others

Energy Efficiency	A
Warranty	5 years
Operating lifetime	30,000h
Operating temperature	-20°C- +45°C
Operating humidity	40%-70%RH
Waterproof grade	IP20,IP65,IP67,IP68
Dimensions	5000*10mm
LED Qty/m	180LED/m
Min cuttable distance	33.3MM(6LED)

Test Report

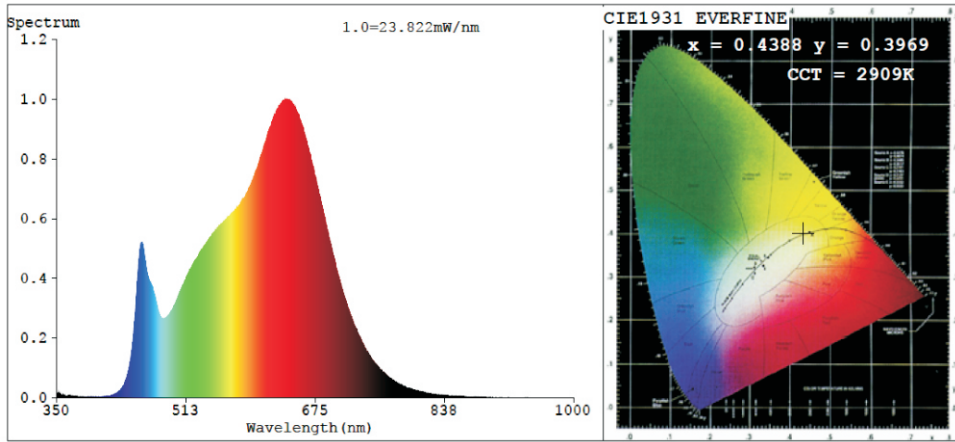

Certifications

Intertek AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple later models identified on the correlation page of the Listing Report. This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Shenzhen Shineky Optoelectronics Co., LTD 2F, H1 Building, Hongfa Hi-tech Park, Tangtou, Shiyuan Town, Bao'an District, Shenzhen, Guangdong China Contact: Bin Wu Phone: +86-755-29116235 Email: huibin@szshiny.com Party Authorized To Apply Mark: Intertek Testing Services Shanghai Report Issuing Office: Intertek Testing Services Shanghai	Manufacturer: Shenzhen Shineky Optoelectronics Co., LTD 2F, H1 Building, Hongfa Hi-tech Park, Tangtou, Shiyuan Town, Bao'an District, Shenzhen, Guangdong China Contact: Bin Wu Phone: +86-755-29116235 Email: ma@szshiny.com
--	--

Control Number: 5000906 **Authorized by:** Thomas J. [Signature] Compliance Manager

This document supersedes all previous Authorizations to Mark for the noted Report Number.

Standards: General Requirements for Luminaires - CIE 115:2010 (Issued: 2004/02/27 Ed. 1 Rev: 2014/02/24) with Cor. 1: 1997, Cor. 2: 1999
Product: Low voltage fixtures LED strip
Models: SK-CY40x2 color "X", "Y" and "Z" in any number, "C" is either the combination of a letter and a number

Intertek Testing Services NA Inc.
 645 East Argonne Road, Aliso Viejo, CA 92656
 Telephone: 949.361.8100 or 949.434.8967 Fax: 949.286.9722

ATM for Report 15030064950A-001 Page 1 of 1 ATM issued 21 May 2015

CERTIFICATE of Conformity
 EC Council Directive 2004/108/EC
 Electromagnetic Compatibility

Registration No.: AE 50329836 0001
 Report No.: 17055806 001

Holder: Shenzhen Shineky Optoelectronics Co., LTD
 2F, H1 Building, Hongfa Hi-tech Park, Tangtou, Shiyuan Town, Bao'an District, Shenzhen, City 518108, P.R. China

Product: LED Lamp (LED Strip)


Identification: Type designation: SK-TH017N1 ('s', 'y', 'a', 'n' are variables, refer to report for details)
 Serial No.: n.a.
 Remark: Refer to test report 17055806 001 for details.

Tested acc. to: CE 18011:2015
 CE 15347:2009

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the License Holder's disposal. This is to certify that the tested sample is in conformity with all provisions of Annex 1 of Council Directive 2004/108/EC. This certificate does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of this certificate is authorized to use this certificate in connection with the CE declaration of conformity according to the a.m. Directive.

Date: 15.01.2015
 TÜV Rheinland LGA Products GmbH · Tillystraße 2 · 90431 Nürnberg
 Dipl.-Ing. Ulf S. C. Steinhilber

CE The CE marking may only be used if all relevant and effective EC Directives are complied with.

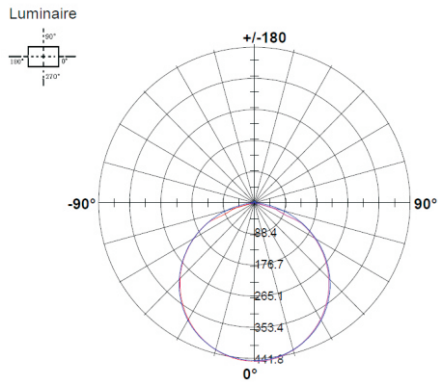

Lux-Distance Curve

Height	E	Diameter
1m	440.44 lx	366.21cm
2m	110.11 lx	512.43cm
3m	48.94 lx	618.64cm
4m	27.53 lx	1224.88cm
5m	17.62 lx	1531.07cm
6m	12.23 lx	1837.29cm

SGS Test Report No: N476181708171041 Date: FEB 18, 2014 Page 1 of 6

SHENZHEN SHINESKY OPTOELECTRONICS CO., LTD
 2F, H1 BUILDING, HONGFA HI-TECH PARK, TANGTOU, SHIYUAN TOWN, BAO'AN DISTRICT, SHENZHEN, P.R. CHINA

This report summarizes the test results of the product described in the test report number 70501708171041. The following sample were submitted and identified by test bench # of the client as:

LED STRIP

Sample Reference Information: SEE ATTACHMENT
 Sample Receiving Date: JAN 07, 2014
 Further Information Date: FEB 18, 2014
 Testing Period: JAN 07, 2014 TO JAN 18, 2014

Test Requested	Conclusion
1. European RoHS Directive 2011/65/EU Annex II (listing 2009/94/EC) (Substance specimens) were tested as specified by the applicant. (Refer to test report 15030064950A-001)	PASS

FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGES:

Signed for and on behalf of:
 SGS S.p.A. Shenzhen Branch Laboratory
 Shenzhen Branch Laboratory

Party Signatory, assessor
 Date: Technical Storage

SGS

SGS CERTIFICATE Certificate: CH033036

SHENZHEN SHINESKY OPTOELECTRONICS CO., LTD.
 2F, H1 Building, Tangtou Hi-tech Park, Tangtou, Shiyuan Town, Bao'an District, Shenzhen, Guangdong, P.R. China
 United States Social Code 514030391868133A

ISO 9001:2015
 Design and manufacture of LED strip products


For further details, please refer to the following pages:
 1. European RoHS Directive 2011/65/EU Annex II (listing 2009/94/EC) (Substance specimens) were tested as specified by the applicant. (Refer to test report 15030064950A-001)

Signed for and on behalf of:
 SGS S.p.A. Shenzhen Branch Laboratory
 Shenzhen Branch Laboratory


Party Signatory, assessor
 Date: Technical Storage

SGS

Installation Instructions

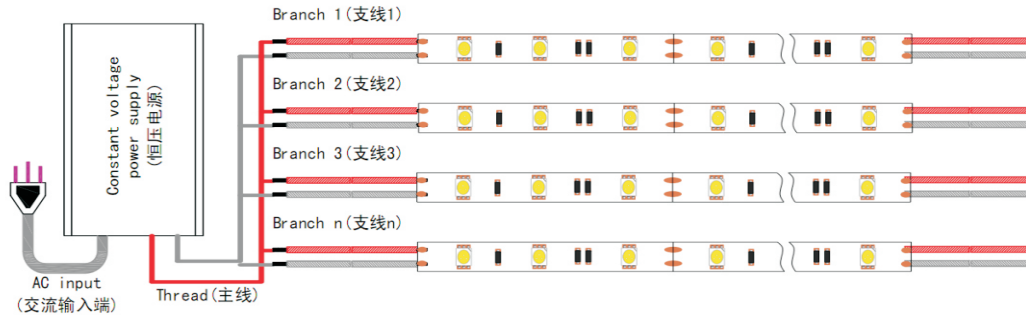

Package


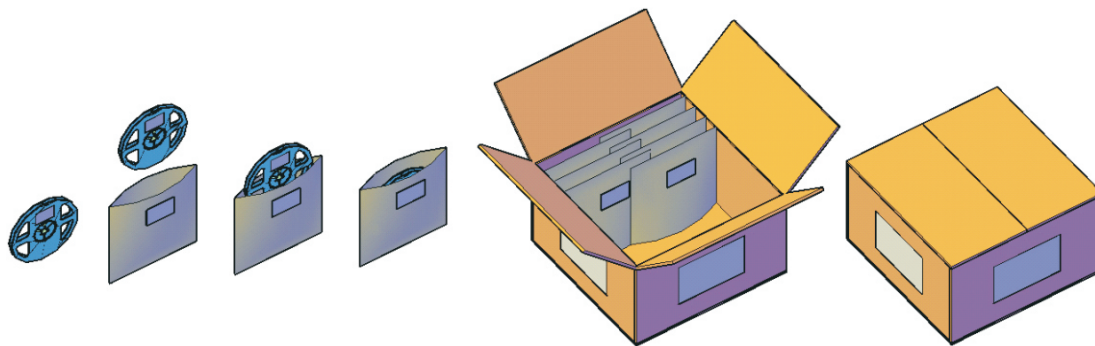


Note:


1. One Aluminum Foil Bag for one roll of LED strip, 5M/roll.
2. All the packaging materials are RoHS standard.
3. Heavy stuff are not allow to be loaded above the packaging box.

⚠ Cautions:

- When install the led strip , please note the installation technique. The led strip can be bent, but not distorted, as shown below:

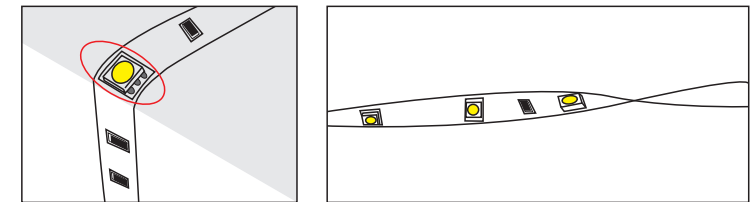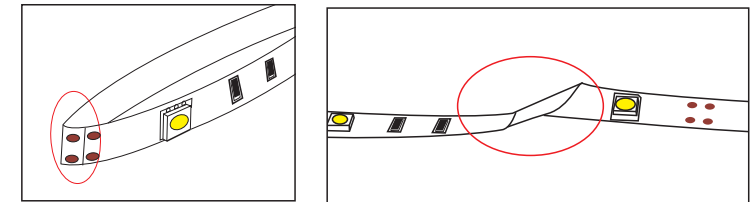

Distortion(Wrong)



Bend(Right)

- LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC110 or AC220V, otherwise it will burn out the LED strips.
- Clean up the installation surface, it will ensure the reliability of the adhesive.
- The electrical connection process must be operated by a professional person.